










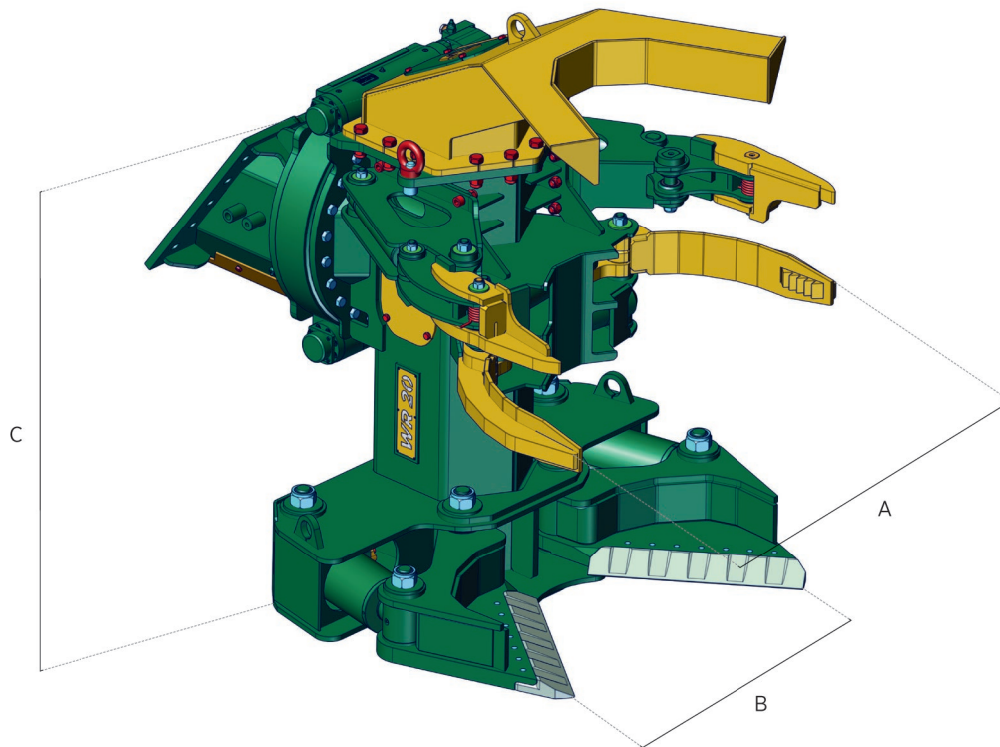






WR SERIES

- TREE SHEAR
- PINZA ABBATTITRICE
- TÊTE SÉCATEUR
- PINZA PARA DEFORESTACIÓN
- BAUMSCHERE



		WR 10		WR 15		WR 20	
--	--	-------	--	-------	--	-------	--

							
 Kg	kg.	1150	100	1455	100	2050	175
A	mm.		950		950		1210
B	mm.		760		900		1010
C	mm.		1480		1620		1900
 Ø max	mm.		400		500		550
 * max	kg.		500		900		1000
 max	bar		340		340		340
 max	l/min.		80		100		150
 max	bar		175		175		175
	l/min.		40 / 80**		40 / 80**		40 / 80**

*Movable load max / *Carico movimentabile max / *Charge admissible max / *Capacidad máxima de carga manejables / *Bewegliches Laden max
 **Double motor / **Doppio motore / **Double moteur / **Doble motor / **Doppelmotor



■ (1) Optimum excavator-equipment combination
 Accoppiamento escavatore-attrezzatura ottimale
 Couplage pelle-équipement optimal
 Acoplamiento excavadora-implimento optimal
 Optimale Bagger-Ausrüstung Kombination

■ (2) Possible excavator-equipment combination
 Accoppiamento escavatore-attrezzatura possibile
 Couplage pelle-équipement possible
 Acoplamiento excavadora-implimento posible
 Mögliche Bagger-Ausrüstung Kombination



HARDOX®
WEAR PLATE

